


应用领域 | Application


- 模拟高清摄像头 | HD Analog Camera



产品特点 | Features

- 高质量专业图像处理: 2MP
High quality professional ISP: 2MP
- 支持Bayer/RCCB输入
Support Bayer/RCCB input
- 支持sensor降帧输入, 更好的暗光效果
Support lower frame rate input, for better dark image quality
- 支持去雾功能
Support dehaze
- 支持镜头畸变矫正
Support lens distortion correction
- 内置PMIC
PMIC inside.

主要模块 | Block Diagram

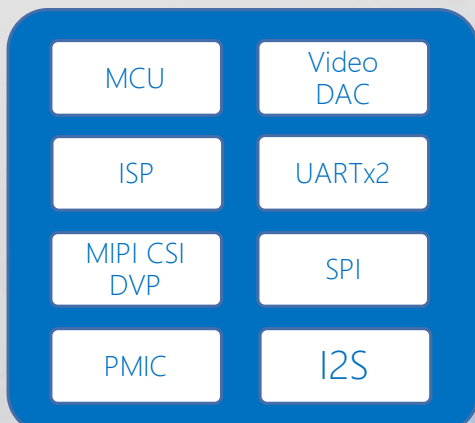

产品规格 | Specifications

CIS	Support up to 2MP inputs
	MIPI or DVP input
	RGB Bayer or RCCB
ISP	High performance CFA
	2DNR, Y/C NR, 3DNR
	Support lower frame rate input, for better dark image quality
	Dehaze
Video Output	Lens Distortion Correction
	AE/AWB/AF
	CVBS: 960H/1280H
Peripherals	HD Analog: 720P/1080P
	I2C, SPI, 2xUART, PWM, GPIO, I2S
PMIC	2xDC/DC, 2xLDO
Package	QFN68, 7mmx7mm

上海 | Shanghai
上海市徐汇区宜山路717号6楼
717 Yishan Road, Block 2, Floor 6, Xuhui District, Shanghai.
Tel: +86 21 6112 1558, Fax: +86 21 6406 6786

深圳 | Shenzhen
南山区高新南一道008号创维大厦A座606
Room 606, Skyworth Tower A, No.008 Gaoxin South 1st Road,
NanShan District, ShenZhen
Tel: +86 0755 86255308

sales@fullhan.com
fae@fullhan.com
www.fullhan.com
stock: 300613.sz

